

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 0 942 547 A1

(12)

EUROPEAN PATENT APPLICATION

published in accordance with Art. 158(3) EPC

(43) Date of publication:

15.09.1999 Bulletin 1999/37

(21) Application number: 98938944.0

(22) Date of filing: 24.08.1998

(51) Int. Cl.⁶: H04J 11/00

(86) International application number:
PCT/JP98/03728

(87) International publication number:
WO 99/12294 (11.03.1999 Gazette 1999/10)

(84) Designated Contracting States:
DE FR GB

(30) Priority: 28.08.1997 JP 23292997

(71) Applicant:
KABUSHIKI KAISHA TOSHIBA
Kawasaki-shi, Kanagawa-ken 210-8572 (JP)

(72) Inventor: YAMASAKI, Shoichiro
Tokyo 154-0001 (JP)

(74) Representative:
Kramer, Reinhold, Dipl.-Ing. et al
Blumbach, Kramer & Partner GbR
Patentanwälte
Radeckestrasse 43
81245 München (DE)

(54) MULTI-CARRIER TRANSMITTER

(57) In the present invention, clip distortions generated when a received multicarrier signal is converted into a digital signal by an A/D 22 are regarded as additive noise, and the positions and number of clip distortions are detected by a DET 28 on the basis of the output from the A/D 22. The difference values between information symbols at two ends of a received block sig-

nal on the frequency axis, which is output from a DFT 24 and known zero symbols are obtained by subtractors 26 and 27. A CAN 25 estimates the magnitudes of clip distortions from the difference values and the detection result of the position and number of clips and cancels the clip distortions.

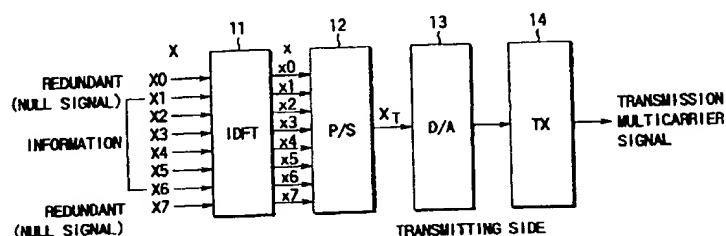


FIG. 2A

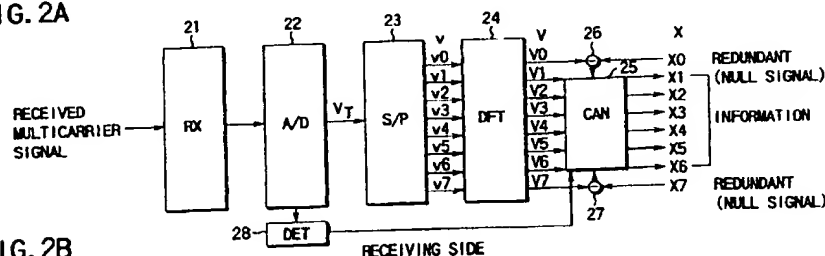


FIG. 2B

EP 0 942 547 A1


PCT

世界知的所有権機関
国際事務局
特許協力条約に基づいて公開された国際出願

(51) 国際特許分類6 H04J 11/00	A1	(11) 国際公開番号 WO99/12294
		(43) 国際公開日 1999年3月11日 (11.03.99)
(21) 国際出願番号 PCT/JP98/03728	(81) 指定国 CA, US, 欧州特許 (DE, FR, GB).	
(22) 国際出願日 1998年8月24日 (24.08.98)	添付公開書類 国際調査報告書	
(30) 優先権データ 特願平9/232929 1997年8月28日 (28.08.97)	JP	
(71) 出願人 (米国を除くすべての指定国について) 株式会社 東芝 (KABUSHIKI KAISHA TOSHIBA) [JP/JP] 〒210-8572 神奈川県川崎市幸区堀川町72番地 Kanagawa, (JP)		
(72) 発明者; および (75) 発明者/出願人 (米国についてのみ) 山崎彰一郎 (YAMASAKI, Shoichiro) [JP/JP] 〒154-0001 東京都世田谷区池尻3-1-1-908 Tokyo, (JP)		
(74) 代理人 弁理士 鈴江武彦, 外 (SUZUKE, Takehiko) 〒100-0013 東京都千代田区霞が関3丁目7番2号 〒100-0013 東京都千代田区霞が関3丁目7番2号 Tokyo, (JP)		

(54) Title: MULTI-CARRIER TRANSMITTER

(54) 発明の名称 マルチキャリア伝送装置

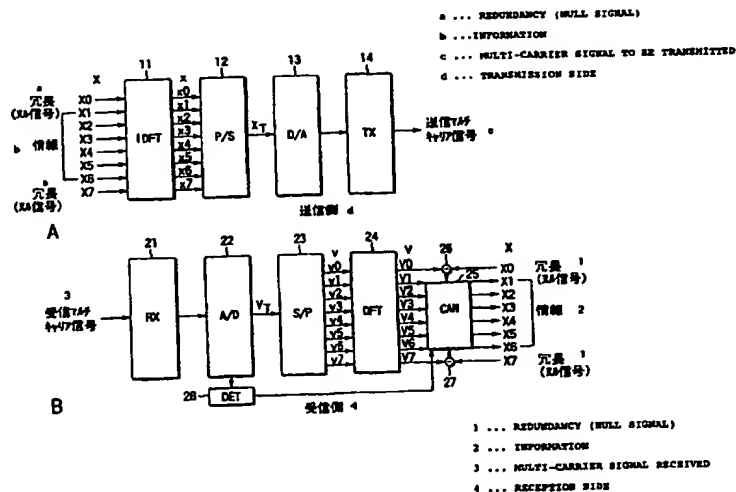

(57) Abstract

A multi-carrier transmitter, wherein a DET (28) finds the locations where clip distortions occur when a received multi-carrier signal is converted into a digital signal and the number of clip distortions by means of an A/D (22) from the output of the A/D (22) while regarding the clip distortions as additional noise. Then subtractors (26, 27) find the difference values between the information symbols at both ends of a received block signal on a frequency axis outputted from a DFT (24) and a known zero symbol, and a CAN (25) estimates the magnitudes of the clip distortions from the difference values and the locations and number of clip distortions and eliminates the clip distortions.